



E232

RS232 to E1 Converter User Manual

Introduction:

E232 interface converter supports the conversion between E1 interface which accord with the ITU-T G.703 standard and RS-232 interface, it can receive synchronous data of 2.048Mbps from E1 network, and transmit the data to ROUTER or other devices. The mode of interface is DCE, and it can be connected with DTE or DCE devices.

Packing List:

E232 is shipped with following items.


1. E232 × 1
2. 220V power line × 1
3. DB25 male to DB9 female cable × 1
4. User manual × 1

Features:

1. Convert RS232 interface to E1(2M unframed G.703) interface
2. Support line recovery clock, local clock and equipment clock
3. Support E1 port loop
4. E1 (G.703) interface support 120ohm (RJ-45) and 75ohm (BNC double coaxial)

Description on Installation and Panels:

1.The product front panel sketch map:



indicator define:

PWR Power indicator. Brightness if electrify.

LOS Frame misstep alarm indicator light


AIS Upriver E1 line alarm indicator light

ERR E1 line cut alarm indicator light.

TD Receive data indicator light from G.703 network, bright as having data receive

RD Send data indicator light from G.703 network, bright as having data receive

2.The product back panel sketch map:



POWER 220VAC input

ON/OFF power switch


Rx/75 ohm E1-75Ω input

Tx/75 ohm E1-75Ω output

RS-232 RS-232 interface(input and output)

Definition of balanced Twisted Pair(120 ohm) wire sequence for RJ45 interface and RS232 interface:

1. 120Ω/RJ45 PIN define

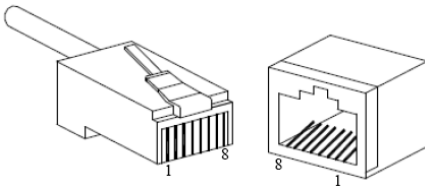

NO.	Function define	I/O
1	NC(null)	
2	RX+(receive data +)	Input
3	RX-(receive data -)	Input
4	GND(ground)	
5	GND(ground)	
6	TX+ (send data+-)	Output
7	TX- (send data -)	Output
8	NC(null)	

2. RS-232 interface define(DB25 interface)

NO.	Function define	I/O
2	TXD	I
3	RXD	O
5	CTS	O
6	DSR	O
7	GND	
8	DCD	O

DIP switch setup (Function setup switch SW1):

1. Impedance setup(NO.1)

OFF: 120ohm ON: 75ohm

2. BNC connect ground setup

NO.2 OFF: No connect ground

ON: Out port connect ground

NO.3 OFF: No connect ground

ON: In port connect ground

3. Clock setup(NO.4)


OFF internal clock

ON line resume clock

4. Loop setup

NO.8 OFF no-loop ON E1 port loop

NO.9 OFF no-loop ON RS-232 port loop

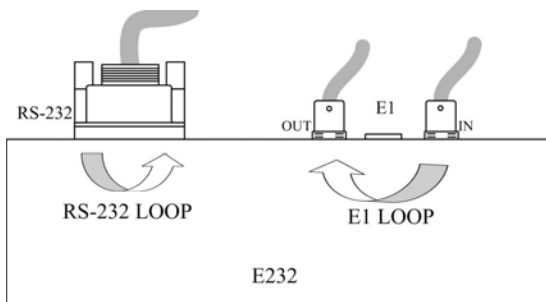

Specifications:

E1 interface

Standard: Comply with ITU-T G.703

Output tingle displace: accord ITU-TG.735 advice

Input tingle limit: accord ITU-TG.823 advice

Output tingle: accord ITU-T G.823 advice

Frame format: unframed

Interface rate: 2.048Mbps±50ppm

CRC checkout: no

Port coding: HDB3

Port transmission: 2KM

Port protection: 1500W surge protection, 15KV ESD protection

Port connector: 120 Ohm(RJ-45) and 75 ohm(BNC double coaxial)

RS-232 port

Standards Compliance: EIA RS-232C

Interface Types: RS-232(DB25 female)

Signal: TXD, RXD, CTS, DSR, GND, DCD

Baud Rate: 0~115.2Kbps

Work mode: DCE

Synchronous serial, fluency transmission

600W surge protection, 15KV ESD protection

Environment, Power and Dimension

Working temperature: -25 to 70°C

Storage temperature: -40 to 85°C

Humidity: Relative humidity 5% to 95%

Input power: 220VAC or -48VDC

Consumption: 2W

Power protection: From high voltage/short circuit

L×W×H: 227.4mm×146.3mm×42.7mm

Shell: Plastic

Weight: 260g

Warranty: 5 years

Certifications:



3onedata

Shenzhen 3onedata Technology Co.,Ltd

Tel: +86-755-26702688 Fax: +86-755-26703485

www.3onedata.com