

IES1024-20F

4-port 10/100M Ethernet+ 20-port 100Base-FX(SC/ST/FC)

Unmanaged Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE 802.3x
- Store and Forward switching process type
- Plug-and-play , auto MDI/MDI-X connection
- Support 8K MAC address
- 10/100BaseT(X)(RJ45)
- Operating temperature range from -40 to 75°C
- Designed without fan
- IP30, rugged high-strength metal case
- 19-inch rack mounting




Introduction

The IES1024-20F industrial Ethernet switches consists of 4 Ethernet ports and 20 Fiber ports that provide an economical solution for your industrial Ethernet connection. The IES1024-20F switches have an operating temperature range of -40 to 75°C, and are designed with

low consumption and without fan. The rugged hardware design makes the IES1024-20F perfect for ensuring that your Ethernet equipment can withstand the rigors of industrial applications.

Dimension

Unit (mm)

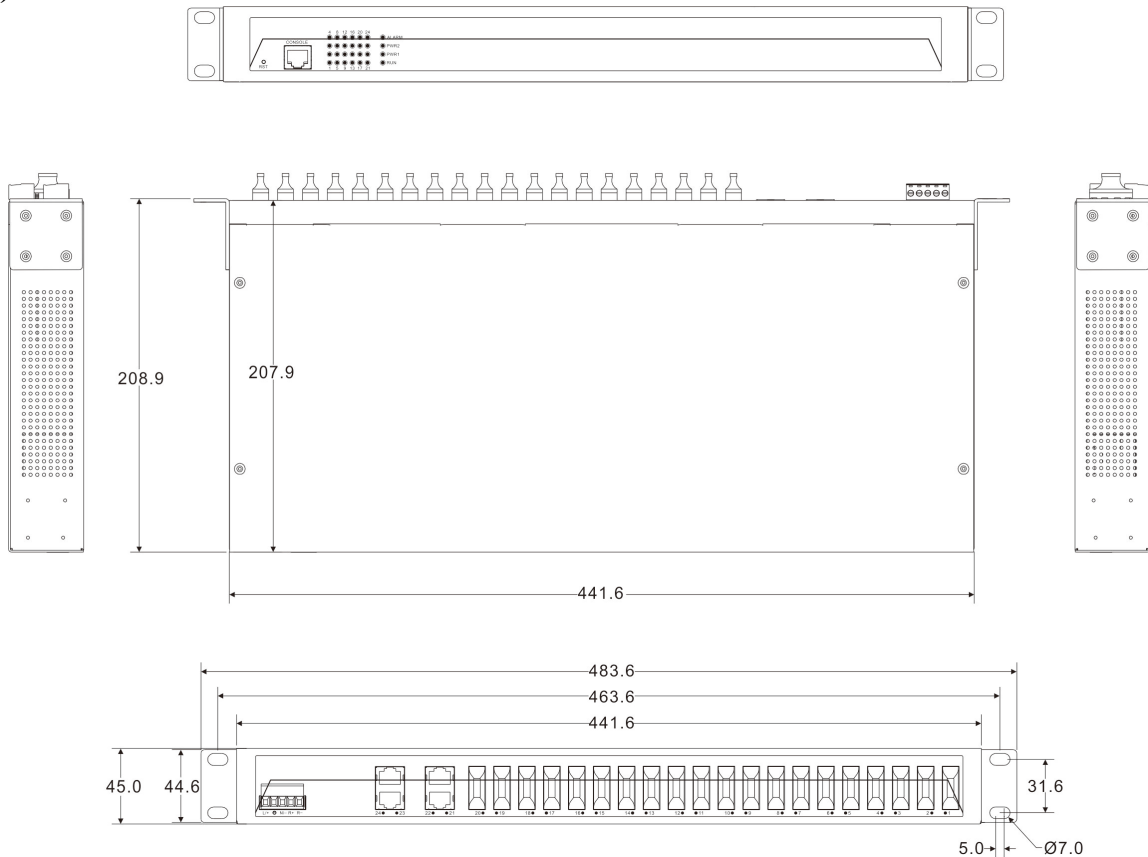



Specification

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE 802.3x,
Flow control: IEEE802.3x flow control, back press flow control

Exchange attribute

100M forward speed: 148810pps
100M maximum filter speed: 148810pps
Transmit mode: store and forward
System exchange bandwidth: 12.8G
MAC address table: 8K
Memory: 4M

Interface

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect
100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm
Console port: Retain
Alarm port: 2 bit terminal block
1 channel relay alarm output
Load ability: 5A@250VAC

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)
Multi-mode: 1310nm, 2/5Km
Single-mode: 1310nm, 20/40/60Km
1550nm, 80/100/120Km

LED indicator

Run indicator: Run
Interface indicator: Link (1~24)
Power supply indicator: PWR
Alarm indicator: Alarm

Power supply

Input Voltage: 100~240VAC
Overload Current Protection: 1.2A
Connection: 3 bit terminal block

Consumption

Unload consumption: 18.8W
Full load consumption: 20.7W

Working environment

Working temperature: -40~75℃
Storage temperature: -40~85℃
Relative Humidity: 5%~95% (no condensation)

Mechanical Structure

Packaging: IP 30 protection, metal case
Installation: 19-inch rack mount
Dimensions (L×W×H): 441.6mm×208.9mm×45mm

Industry Standard

EMS: EN61000-4-2 (ESD) , Level 4
EN61000-4-4 (EFT) , Level 4
EN61000-4-5 (Surge) , Level 4

Warranty: 5 years

Ordering Information

IES1024-20F (M): 4 port 10/100Baes-T(X) + 20 port 100Base-FX Multi-mode SC/ST/FC, 100~240VAC;
IES1024-20F (S): 4 port 10/100Baes-T(X) + 20 port 100Base-FX Single-mode SC/ST/FC, 100~240VAC;
IES1024-20F (SS): 4 port 10/100Baes-T(X) + 20 port 100Base-FX single-mode, single fiber SC/ST/FC, 100~240VAC.

Packing List

1. Ethernet switch IES1024-20F (plus terminal block) × 1
2. User manual × 1
3. Certificate of quality × 1
4. Warranty card × 1
5. Power cable × 1