


NP3016T-16DI (RS-485)

16 Port RS-485/422to Ethernet Serial Server

Features

- ⊙ Support 10/100M Ethernet
- ⊙ Support 16 Port RS-485/422
- ⊙ Support WEB and Telnet configuration
- ⊙ Support TCP, UDP, ARP, ICMP, DHCP and DNS protocol
- ⊙ Support TCP Server, TCP Client, TCP Auto, UDP and Real COM driver working mode
- ⊙ Support UDP multicast and UDP subnet mode
- ⊙ Support heartbeat time and time over disconnect function
- ⊙ Support cross-gateway and cross-router communication
- ⊙ Support virtual serial COM port access and Network interruption automatic recovery
- ⊙ Provide Windows configuration tools for easy to use, easy to bath install.
- ⊙ Industrial grade design, IP30 protection grade
- ⊙ No fan, low consumption design
- ⊙ Working temperature: -25~55°C

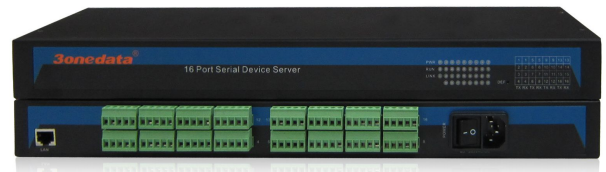

Introduction

NP3016T-16DI (RS-485) is an high performance, industrial grade serial to Ethernet server, it can satisfy some kinds of customer requirements in consumption, temperature, volume and handle ability. It provides 16port RS-485/422(RS-485/422 connector: 5 bit terminal block) and 1 port 10/100Base-Tx Ethernet, can focus manage disperse serial device, master through network, easy, convenience. In application, can configure, upgrade through WEB


Moreover, NP3016T-16DI (RS-485) provide strong function

configuration tools based in Windows platform, it can guide user configure the device step by step, all configurations are coming true by WEB or Telnet, support cross-gateway and cross-router, user can flexible configure IP address, server and client mode, data bag size etc.

NP3016T-16DI (RS-485) adopts EMC protection design, can work in rugged environment.

Dimension

Unit (mm)

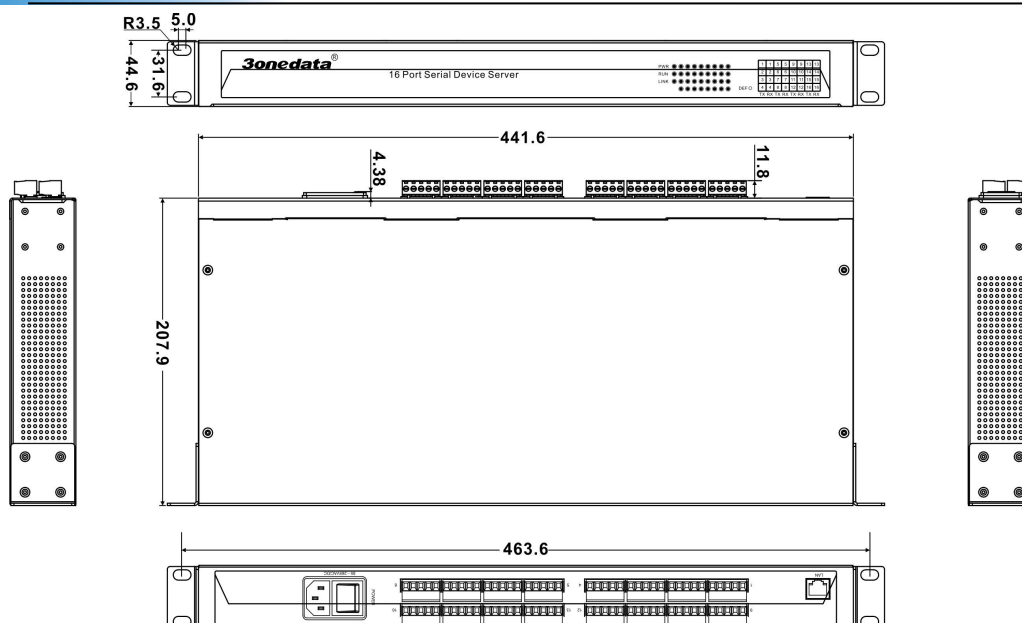



Specification

Ethernet port

Standard: 10Base-T, 100Base-TX

Protocol: Support TCP, UDP, APR, ICMP and DHCP

Signal: Rx+, Rx-, Tx+, Tx-

Speed: 10/100Mbps

Working: Full-duplex and half duplex

Working mode: Support TCP Server and Client

Transfer distance: 100m

Connector: RJ45

RS-485/422 port

RS-485/422 port number: 16

RS-422 signal: T+(A), T-(B), R+(A), R-(B), GND

RS-485 signal: D+(A), D-(B), GND

Parity bit: None, Even, Odd, Space, Mark

Data bit: 5bit, 6bit, 7bit, 8bit

Stop bit: 1bit, 2bit

Band rate: 300bps~115200bps

Loading: support 32 nodes loop back

Transfer distance: 1200m

Connector: 4-bit terminal block

Protection: class 3 static, 1.5KVAC isolation

LED Indicator

Working statue indicator: RUN

Power (PWR)

Ethernet port connection statue (Link)

RS-485/422 port transmit data indicator: TX1~TX16

RS-485/422 port receive data indicator: RX1~RX16

Power requirements

Input Voltage: 85~265VAC/DC

No-load consumption: 8.8W@220VAC

Full-load consumption: 10.1W@220VAC

Mechanical

Shell: IP30 protection, metal shell

Installation: 1U 19" rack mount

Weight: 2500g

Size (L×W×H): 441.6mm×207.9mm×44.6mm

Environment limits

Working temperature: -25~55℃

Storage temperature: -30~85℃

Relative humidity: 5%~95% (non-condensing)

Standard

EMI: EN 55022 Class A, FCC Part 15

EMS: EN 61000-4-2 (ESD) Level 3,

Shock: IEC 60068-2-27

Free fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Warranty

Warranty time: 5 years

Certificates

CE, FCC, RoHS, UL508 (pending)

Ordering Information

NP3016T-16DI (RS-485) 16-port RS-485/422 to Ethernet (10M/100M), AC85~265V, wall mounting

Packing List

1. NP3016T-16DI(RS-485) × 1
2. User manual × 1
3. Power cable × 1
4. CD × 1
5. Warranty card × 1
6. Certificate of quality × 1