

IES5028-4GS-8F

16-port 10/100M Ethernet + 8-port 100Base-FX (SC/ST/FC) +

4-port Gigabit (SFP slot) Managed Industrial Ethernet Switch

Features

- Support IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE 802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W
- SW-Ring ring network patent technology (Fault recovery time<20ms)
- Support RSTP, way exchange time<50ms
- Support Port based VLAN and IEEE 802.1Q VLAN
- Support absolutely and opposite priority, support IEEE802.1P, DSCP priority
- Support Based Tag port Tag trunking, IEEE802.3ad, 2 group trunking link
- Support MAC address learning, aging automatic
- Support rate control, Broadcast storm control
- Support configuration file up and download
- Support WEB configuration
- Support 8K MAC address
- Support static and dynamic IGMP
- Support bi-directional port mirroring
- Support 1 channel relay alarm output
- Industrial grade 4 design, -40-75°C work temperature
- No fan design, 19 inch rack mounting
- IP30 protection grade



Introduction

IES5028-4GS-8F is an industrial grade, managed and redundancy Ethernet switch which supports 16 Ethernet Ports, 8 Fiber ports and 4 Gigabit (SFP slot) ports. It provided some kinds of advanced network managed function, like as: SW-Ring redundancy ring network, VLAN, Trunking, Quality of Service, Speed control, port mirroring, fault alarm and firmware upgrade online. SW-Ring can bring your Ethernet to intelligent redundancy. Standard Industry design, can satisfied every requirement of the industry scene. All components used industry grade, it takes products high reliability. It provided


wide voltage power supply input.

SW-Ring™ is an arithmetic designed as a rapid redundancy network. It provided recover technology for fault of rapid redundant network, the recovery time<20ms.

Product accorded to CE, FCC standard and Industry grade 4 design requirement, support 1 channel power input and 1 channel relay alarm output, and -40~75 °C working temperature, can meet all kinds of Industrial environment requirement. It can use in power, water conservancy, transportation area etc.

Dimension

Unit (mm)

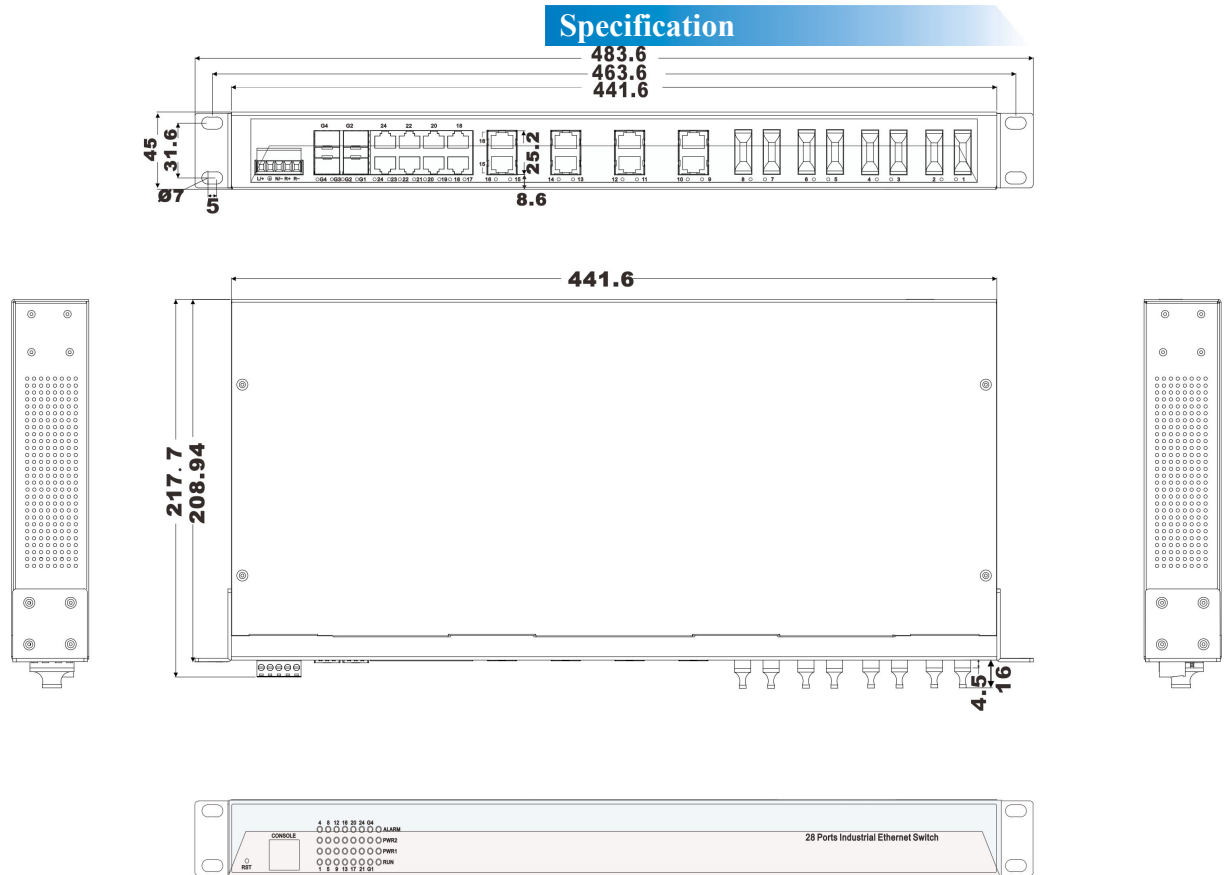

Technology

Standard: Support IEEE802.3, IEEE802.3u, IEEE802.3z, IEEE802.3x, IEEE802.1Q, IEEE802.1p, IEEE802.1D, IEEE802.1W, IEEE802.3ad

Protocol: ARP, ICMP, TCP, DHCP, DNS, HTTP, Telnet, SW-Ring, RSTP, SNMP

Flow control: IEEE802.3x flow control, back press flow control

Function

Switch function: SW-Ring, QOS, 802.1QVLAN, RSTP, SNMP, Port trunking, static multicast filter, port mirroring, bandwidth management, broadcast storm control, port flow statistics, upgrade online, up and download configuration file, user name access system

SW-Ring: Support Single, Couple, Chain, Dual homing

Exchange attribute

100M forward speed: 148810pps

1000M forward filter speed: 1488100pps

Transmit mode: store and forward

System exchange bandwidth: 12.8G

MAC address table: 8K

Memory: 4M

Interface

Electric port: 10Base-T/100Base-TX auto speed control, Half/full duplex and MDI/MDI-X auto detect

100M optic fiber port: 100Base-FX, SC/ST/FC connector, support single mode (20/40/60/80Km optional), multi mode (2Km), wavelength: 1310nm, 1550nm

1000M fiber port: 1000Base-FX (SFP port)

Console port: debug serial port carry out CLI command

Alarm port: 2 bit terminal block

1 channel relay alarm output

Transfer distance

Twisted cable: 100M (standard CAT5/CAT5e cable)

Multi-mode: 1310nm, 2/5Km

Single-mode: 1310nm, 20/40/60Km

1550nm, 80/100/120Km

LED indicator

Run indicator: Run

Interface indicator: Link (1~24/G1~G4)

Power supply indicator: PWR



Alarm indicator: Alarm

Power supply

Input Voltage: 100~240VAC
Type of input: 3 bits terminal block
Overload current protect: 1.2A

Consumption

No-load consumption: 12.6W
Full-load consumption: 18.3W

Working environment

Working temperature: -40~75°C
Storage temperature: -40~85°C
Relative Humidity: 5%~95% (no condensation)

Mechanical Structure

Shell: IP30 protect grade, metal shell
Installation: 19" 1U rack
Size (W×H×D): 441.6mm×45mm×208.9mm

Industry Standard

EMI: FCC Part 15, CISPR (EN55022) class A
EMS: EN61000-4-2 (ESD), Level 4
EN61000-4-3 (RS), Level 3
EN61000-4-4 (EFT), Level 4
EN61000-4-5 (Surge), Level 4
EN61000-4-6 (CS), Level 3
EN61000-4-8, Level 5

Shock: IEC 60068-2-27
Free fall: IEC 60068-2-32
Vibration: IEC 60068-2-6

Certification

CE, FCC, RoHS, UL508 (Pending)

Warranty: 5 years

Ordering Information

IES5028-4GS-8F (M): 16 port 10/100Baes-T(X) + 8 port 100Base-FX Multi-mode SC/ST/FC+ 4 port gigabit (SFP slot), 100-240VAC

IES5028-4GS-8F (S): 16 port 10/100Baes-T(X) + 8 port 100Base-FX Single-mode SC/ST/FC+4 port gigabit (SFP slot), 100-240VAC

IES5028-4GS-8F (SS): 16 port 10/100Baes-T(X) + 8 port 100Base-FX single-mode, single fiber SC/ST/FC+ 4 port gigabit (SFP slot), 100-240VAC

Packing List

1. Ethernet switch IES5028-4GS-8F (plus terminal block) ×1
2. User manual × 1
3. CD × 1
4. Certificate of quality × 1
5. Warranty card × 1
6. Power cable × 1